


HSS4L



HSS4L-16/18C

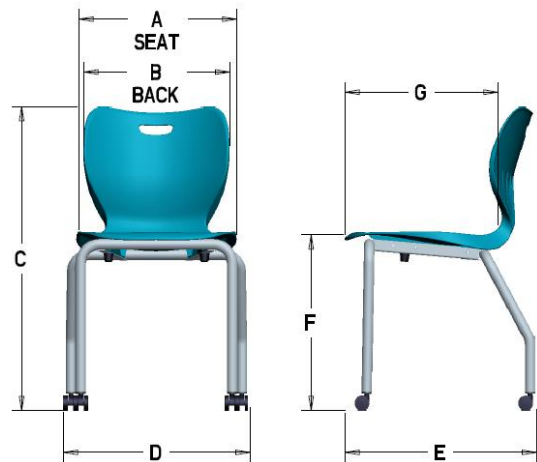

HSSTK-18B



HSSST-18B

QUICK REFERENCE TABLE

Dimension	HSS4L-12A	HSS4L-14A	HSS4L-16B	HSS4L-18B	HSS4L-16BC	HSS4L-18BC	HSSTK-18B	HSSST-18B
A	14 5/8	14 5/8	16 1/2	16 1/2	16 1/2	16 1/2	16 1/2	16 1/2
B	13 3/8	13 3/8	15 3/8	15 3/8	15 3/8	15 3/8	15 3/8	15 3/8
C	23 1/2	25 1/2	29	31	29 5/8	31 5/8	30 - 35	36-46
D	17	17	16 1/2	16 1/2	19 5/8	19 5/8	21 3/4	21 3/4
E	17	17	16 1/4	16 1/4	16 1/4	16 1/4	21 3/4	21 3/4
F	11 3/4	13 3/4	15 3/4	17 3/4	16 5/8	18 5/8	16-21	22-32
G	14	14	16 1/8	16 1/8	16 1/8	16 1/8	16 1/8	16 1/8
Shipping Weight	45 lb	49 lb	54 lb	58 lb	54 lb	58 lb	23 lb	28 lb
Indv. Unit Weight	10 lb	11 lb	12 lb	13 lb	12 lb	13 lb	17 lb	21 lb
Cubes (ft ³)	11.9	11.9	15.6	15.6	15.6	15.6	5.21	12.8
Quantity/ Carton	4	4	4	4	4	4	1	1

Models:

HSSL-12A	HSSTK-18A
HSSL-14A	HSSST-18A
HSSL-16A	HSSA-WB1618
HSSL-18A	
HSSL-16A.C	
HSSL-18A.C	

Features:

- Base options include four-leg, task or stool
- 4-leg models standard with nylon swivel glides
- 16" and 18" 4-leg models available with optional multi-surface casters
- High impact resistance one-piece seat shell
- Easy access handle

Construction:

Seat Shell (All models)

One-piece 0.25" thick lightweight seat shell is constructed of 90% polypropylene and 10% glass fiber. Includes a molded-in handle that is 3.5" w x 1.125" h.

4-Leg Chair Frame (HSSL)

Leg assembly is comprised of two 1.125" OD, 14-gauge steel tubes welded to two 12-gauge sheet metal L-brackets. Seat shell is attached with six 3/8" diameter steel mandrel rivets. Frame assembly is powder coat or chrome finish. Includes 1.25" diameter, self-leveling (swivel) glides with a nylon surface. Optional casters for 4-leg chairs are: 40mm

Task Chair (HSSTK)

Standard with a 5-leg, 25.5" injection molded base. Heavy duty steel control is attached using six 3/8" diameter steel mandrel rivets to two 12-gauge sheet steel L-brackets. Pneumatic gas cylinder provides a 5" seat height adjustment range (16" – 21"). Available with 50mm hard or soft dual-wheel hooded casters or nylon bell glides.

Additional Information:

Stool (HSSST)


Standard with a 5-leg, 25.5" injection molded base with a height adjustable 20.0" diameter steel foot-ring. Foot-ring is height adjustable from 7.25" to 12.75". Heavy duty steel control is attached using six 3/8" diameter steel mandrel rivets to two 12-gauge sheet steel L-brackets. Pneumatic gas cylinder provides a 10" seat height adjustment range (22" – 32") Available with 50mm hard or soft dual-wheel hooded casters or nylon bell glides.

Shipping Information: Four-leg chairs and Four-leg caster chairs ship four (4) per carton. Task and Stool models are one (1) per carton. Wire book basket ships four (4) per carton

Compliance: Product meets or exceeds applicable ANSI/BIFMA and ISTA Performance Standards.

Wire Under-Seat Book Box (HSSA-WB1618)

Utilizes 6mm wire frame. Tool-less mounting hooks are plastic covered to protect the chairs finish. Use with 16" and 18" 4-leg chairs only. Chrome finish only

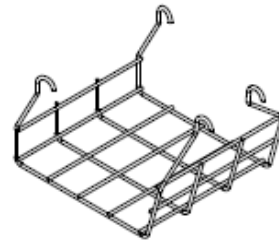

Outside: 12.25"W x 16"L x 9.75"H

Inside: 12.25"W x 14"L x 6.5"H

The HON Company
200 Oak Street
Muscatine, IA 52761
800-833-3964
hon.com